

1049P

Plug Top 3 Pin 6A

CONSTRUCTION

Product Category	Plug tops
Product Range	Domestic Range
Product Type	6A Plug top
Shape	Not Applicable
Material	Polycarb (Cover)
Finish	Moulded
Mounting Type	Not Applicable

POWER

Current	6 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Switched Poles	Not Applicable
Rocker Switches	Not Applicable
Number of Ways	Not Applicable
Non Dedicated	SANS 164-3
Dedicated	Not Applicable

AESTHETICS

Colour	White
Rocker Colour	Not Applicable
Switched Outlet	Not Applicable
Key Features	6A

TERMINAL

L & N Terminal	Ø 4
Earth Terminal	Ø 4
Cable Strip Length	8 — 12mm
Screwdriver Type	Slotted Type (Terminals)
Torque requirement	1.2Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C
IP Rating	IP20

DIMENSIONAL / FIXING

Height	45mm
Width	38mm
Depth Overall	38mm
Gross Weight	0,060 kg
Fixing Centres	20mm
Mounting Box	Not Applicable

STANDARDS

Standards	SABS
Other Markings	Not Applicable



PACKAGING

Inner Carton Qty	1
Master Carton Qty	100



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data

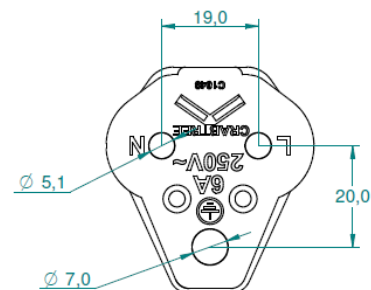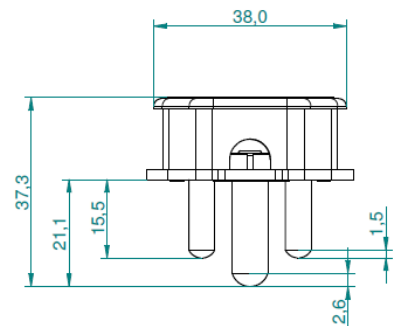

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za