

1436W

Round Conduit Box Socket 50mm

CONSTRUCTION

Product Category	Wiring Accessory
Product Range	Classic
Product Type	Socket Outlet 6 Amps
Shape	Round plate
Material	Polycarbonate (Cover)
Finish	Moulded
Mounting Type	Flush/Surface

POWER

Current	6 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Switched Poles	Not Applicable
Rocker Switches	Un-switched
Number of Ways	Not Applicable
Non Dedicated	SANS 164-3
Dedicated	Not Applicable

AESTHETICS

Plate Colour	White
Rocker Colour	Not Applicable
Switched Outlet	N
Key Features	Single 6A Shuttered Socket

TERMINAL

L & N Terminal	4mm X 4mm
Earth Terminal	Ø 4
Cable Strip Length	10mm
Screwdriver Type	Slotted Type
Torque requirement	1.2Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C
IP Rating	IP20

DIMENSIONAL / FIXING

Height	66mm
Width	66mm
Depth Overall	20mm
Depth Interior only	10mm
Gross Weight	0,028 kg
Fixing Centres	50mm
Mounting Box	9018 (or similar)

STANDARDS

Standards	SABS
Other Markings	LM


PACKAGING

Inner Carton Qty	10
Master Carton Qty	100



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data

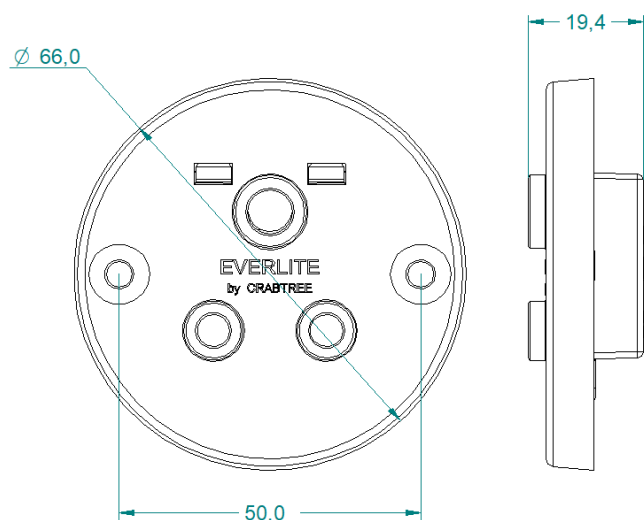

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za