

4900

Industrial Socket

CONSTRUCTION

Product Category	Wiring Accessory
Product Range	Industrial
Product Type	Socket Outlet 16 Amps
Shape	4x2
Material	Polycarbonate (Cover)
Finish	Moulded
Mounting Type	Flush/Surface

POWER

Current	20 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Rocker Switches	Switched
Non Dedicated	SANS 164-1

AESTHETICS

Plate Colour	White and Black
Key Features	Duo Socket

TERMINAL

L & N Terminal	7mm x 7mm
Earth Terminal	7mm x 7mm
Cable Strip Length	10mm
Screwdriver Type	Slotted Type
Torque requirement	1.2Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C

DIMENSIONAL / FIXING

Height	74mm
Width	97.6mm
Depth Overall	36.9mm
Depth Interior only	25.1mm
Gross Weight	0,150 kg

STANDARDS

Standards	SABS
-----------	------


PACKAGING

Inner Carton Qty	5
Master Carton Qty	N/A



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data

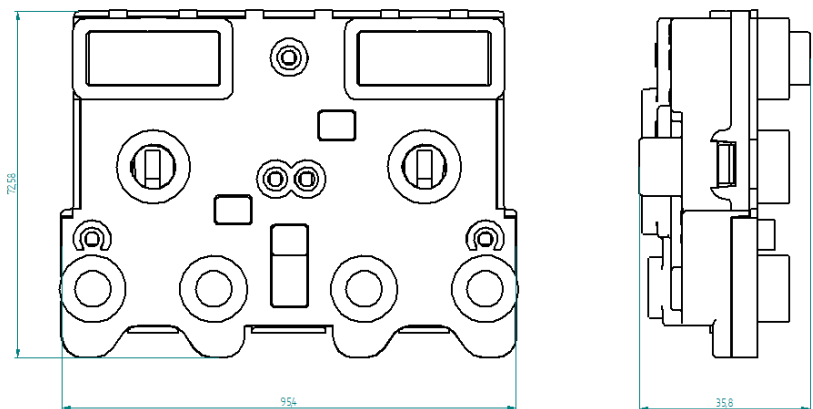

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za