

## SHEET 1 of 2

### 6857 (ALL VARIANTS)

Classic Slimline 16A Socket Module



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

## Technical Data

#### CONSTRUCTION

|                  |                                  |
|------------------|----------------------------------|
| Product Category | Wiring Accessory                 |
| Product Range    | Classic                          |
| Product Type     | Ducting                          |
| Shape            | Module                           |
| Material         | Polycarbonate & Galvanized Steel |
| Finish           | Moulded/ Clean and Bur Free      |
| Mounting Type    | Flush/Surface                    |

#### POWER

|                 |              |
|-----------------|--------------|
| Current         | 16 Amps      |
| Current Type    | AC           |
| Frequency       | 50Hz         |
| Input Voltage   | 250V         |
| Rocker Switches | Un-switched  |
| Non Dedicated   | SANS 164-2   |
| Dedicated       | SANS 164-2-1 |

#### AESTHETICS

|              |                          |
|--------------|--------------------------|
| Plate Colour | White, Black, Red & Blue |
| Key Features | 16A Socket module        |

#### TERMINAL

|                    |              |
|--------------------|--------------|
| L & N Terminal     | 4mm x 5mm    |
| Earth Terminal     | 4mm x 5mm    |
| Cable Strip Length | 10mm         |
| Screwdriver Type   | Slotted Type |
| Torque requirement | 0.8Nm        |

#### LOCATION

|                            |       |
|----------------------------|-------|
| Max Ambient Operating Temp | +40°C |
| Min Ambient Operating Temp | -5°C  |

#### DIMENSIONAL / FIXING

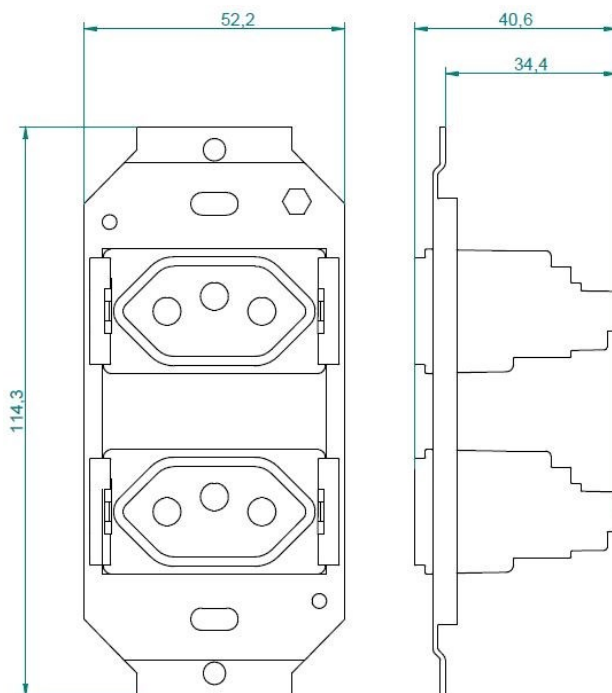
|                     |          |
|---------------------|----------|
| Height              | 114.3mm  |
| Width               | 52.2mm   |
| Depth Overall       | 40.6mm   |
| Depth Interior only | 34.4mm   |
| Gross Weight        | 0,075 kg |

#### STANDARDS

|                |                          |
|----------------|--------------------------|
| Standards      | SABS                     |
| Other Markings | S5, If Dedicated Use S5D |

#### PACKAGING

|                   |     |
|-------------------|-----|
| Inner Carton Qty  | 20  |
| Master Carton Qty | 200 |



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



[www.crabtree.co.za](http://www.crabtree.co.za)



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



[info@crabtree.co.za](mailto:info@crabtree.co.za)

**6857 (ALL VARIANTS)**




Classic Slimline 16A Socket Module



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

| Slimline Unswitched Sockets on Yoke 50 x 100mm  |        |             |
|-------------------------------------------------|--------|-------------|
| Description                                     | Colour | Part Number |
| Classic Slimline 16A Double Socket 164-2 + Yoke | White  | 6857P       |
| Classic Slimline 16A Double Socket 164-2 + Yoke | Black  | 6857/008    |

| Slimline Unswitched Sockets on Yoke 50 x 100mm          |        |             |
|---------------------------------------------------------|--------|-------------|
| Description                                             | Colour | Part Number |
| Classic Slimline Dedicated 16A Double Socket 164-2+Yoke | Red    | 6857D/003   |
| Classic Slimline Dedicated 16A Double Socket 164-2+Yoke | Blue   | 6857D/007   |
| Classic Slimline Dedicated 16A Double Socket 164-2+Yoke | Black  | 6857D/008   |

| 1           | 2                                                                                   | 3                       | 4      |
|-------------|-------------------------------------------------------------------------------------|-------------------------|--------|
| Part Number | Dimple                                                                              | Offset from Centre (mm) | Colour |
| 11850D/003  |   | 0                       | Red    |
| 11850D/007  |  | 3                       | Blue   |
| 11850D/008  |  | 3                       | Black  |

**Note:**

Dedicated socket outlets are provided for supplies which are intended for "Clean" power, UPS and Non RCD protected outlets. The Earth connections A and B are therefore separated and not internally connected in the socket module. Where separation is NOT required, the installer needs to provide a link between A and B.

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd &amp; Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za