



THAT WHICH IS **BUILT SOUNDLY**
ENDURES WELL

DIAMOND RANGE




DIAMOND RANGE

PRODUCT CODE EXPLANATION

DIAMOND RANGE SWITCH MODULES

Explanation

STANDARD COLOUR WHITE

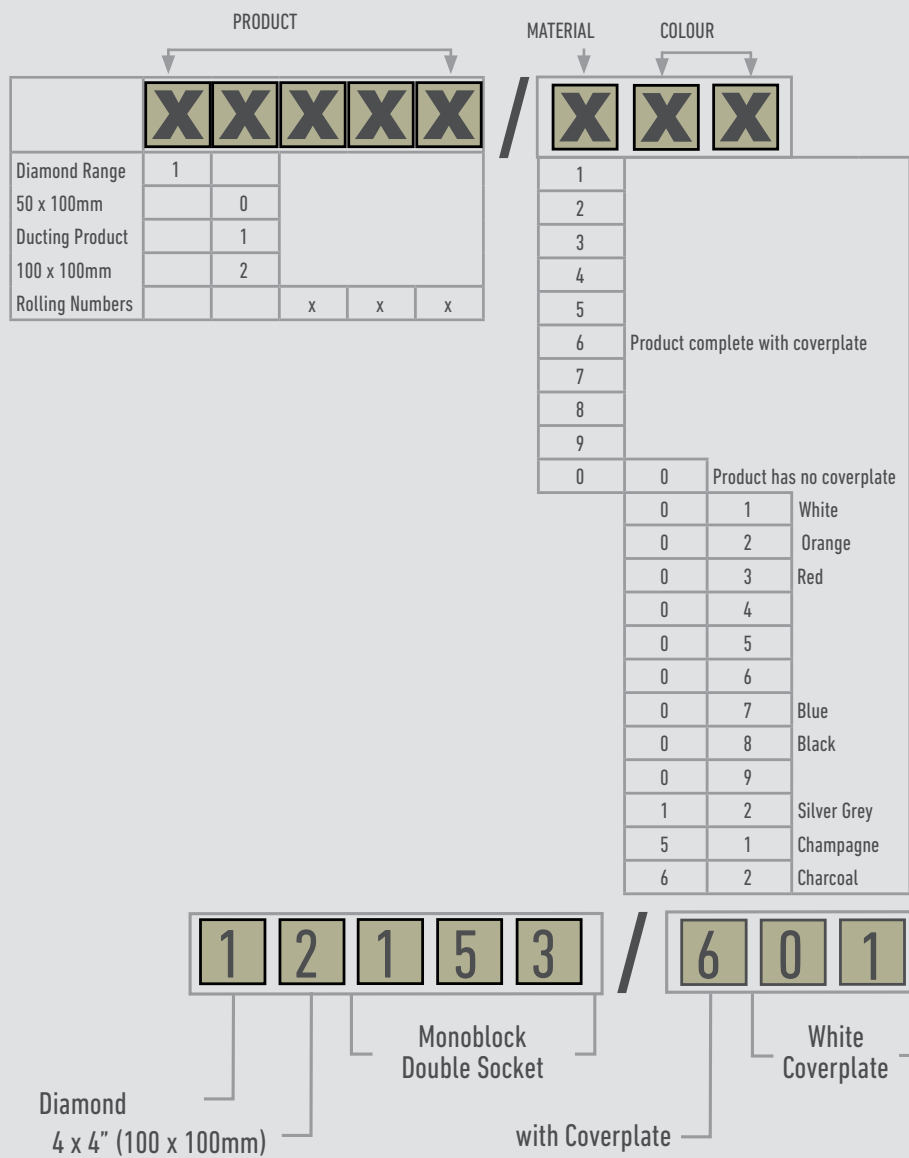

1 Way Switch Module

Colour	Part Number
White	10901/001
Red	10901/003
Blue	10901/007
Black	10901/008



2 Way Switch Module

Colour	Part Number
White	10902/001
Red	10902/003
Blue	10902/007
Black	10902/008



1 Way Switch Module + LED

Colour	Part Number
White	10981/001
Black	10981/008



1 Way Double Pole Switch Module

Colour	Part Number
White	10904/001
Red	10904/003
Blue	10904/007
Black	10904/008





1 Way Double Pole Switch Module + LED (WD)

Colour	Part Number
White	10984/001
Black	10984/008

Bell Press Switch Module Dim-On-Off

Colour	Part Number
White	10930/001
Black	10930/008



1 Way Double Pole Wide Switch Module

Colour	Part Number
White	10904/001WD
Black	10904/008WD

Bell Press Switch Module No Symbol

Colour	Part Number
White	10930/001NS
Black	10930/008NS



Intermediate Switch Module

Colour	Part Number
White	10905/001
Black	10905/008

Blanking Module

Colour	Part Number
White	10999/001
Black	10999/008



Bell Press Switch Module

Colour	Part Number
White	10903/001
Black	10903/008

Satelite Module

Colour	Part Number
White	10996/001
Black	10996/008



DIAMOND RANGE
YOKES

DIAMOND RANGE
COVERPLATE COLOUR RANGE



Yokes 50 x 100mm	
Description	Part Number
Diamond 1 to 3 Lever Yoke	10730/000

2 x 4 Blanks 50 x 100mm	
Description	Part Number
White	10009/601
Red	10009/603
Blue	10009/607
Black	10009/608
Silver Grey	10009/612
Champagne	10009/651
Charcoal	10009/662



Yokes 50 x 100mm	
Description	Part Number
Diamond 1 to 4 Lever Yoke	10740/000

4 x 4 Blanks 100 x 100mm	
Description	Part Number
White	12009/601
Red	12009/603
Blue	12009/607
Black	12009/608
Silver Grey	12009/612
Champagne	12009/651
Charcoal	12009/662



Yokes 100 x 100mm	
Description	Part Number
Diamond 1 to 4 Lever Yoke	12740/000

DIAMOND RANGE
SWITCHES ON YOKE COMPLETE WITH COVERPLATE

DIAMOND RANGE
SWITCHES ON YOKE COMPLETE WITH COVERPLATE



Switches on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever 1 Way Switch + Cover	White	10011/601
Diamond 1 Lever 2 Way Switch + Cover	White	10012/601



Switches on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever 1 Way Switch + Cover	White	10021/601
Diamond 2 Lever 1x1 & 1x2 Way Switch + Cover	White	10022/601
Diamond 2 Lever 2 Way Switch + Cover	White	10023/601
Diamond 1 Lever Intermediate Switch + Cover	White	10020/601



Switches on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever 1 Way Switch + Cover	White	10031/601
Diamond 3 Lever 2x1 & 1x2 Way Switch + Cover	White	10032/601
Diamond 3 Lever 1x1 & 2x2 Way Switch + Cover	White	10033/601



Switches on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever 1 Way Switch + Cover	White	10041/601

Switches on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever Double Pole Switch + Cord Grip + Cover Vertical	White	10071/6



Switches on Yoke Complete 100 x 50mm		
Description	Colour	Part Number
Diamond 1 Lever Double Pole Switch + Cord Grip + Cover Horizontal	White	10076/6



Double Pole Switch on Yoke + Cover 50 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever Double Pole + Cover	White	10016/601



Switches on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever Double Pole + Cord Grip + Cover	White	12071/601



DIAMOND RANGE
SWITCHES ON YOKE COMPLETE WITH COVERPLATE

DIAMOND RANGE
SOCKETS ON YOKE COMPLETE WITH COVERPLATE



Switches on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever 1 Way Switch + Cover	White	12011/601



Switches on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever 1 Way Switch + Cover	White	12021/601



Switches on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever 1 Way Switch + Cover	White	12031/601



Switches on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever 4 x 1 Way Switch + Cover	White	12041/601

Slimline Sockets on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond Single Slimline 16A Socket + Cover	White	10051/6



Sockets on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond Double Slimline 16A Socket + Cover	White	10052/6



Sockets on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond Single Slimline Switch Socket + Cover	White	10053/6



Sockets on Yoke Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 16A Single Vertical Socket + Cover	White	10050/601



DIAMOND RANGE
SOCKETS ON YOKE COMPLETE WITH
COVERPLATE



Sockets on Yoke Complete 100 x 50mm		
Description	Colour	Part Number
Diamond Single Horizontal Switch Socket + Cover	White	10060/601



Isolators 50 x 100mm		
Description	Colour	Part Number
Diamond 30A Double Pole Isolator + Cover	White	10230/601
Diamond 60A Double Pole Isolator + Cover	White	10260/601
Diamond 60A Triple Pole Isolator + Cover	White	10360/601



Shaver Socket Complete 50 x 100mm		
Description	Colour	Part Number
Diamond 220V Shaver Socket	White	10400/601P



Isolator 100 x 100mm		
Description	Colour	Part Number
Diamond 30A Double Pole Isolator + Cover	White	12230/601
Diamond 60A Double Pole Isolator + Cover	White	12260/601
Diamond 60A Triple Pole Isolator + Cover	White	12360/601

Shaver Socket on Yoke 100 x 100mm		Coverplate 100 x 100mm	
Description	Part Number	Description	Part Number
White	12400/601	White	12090/601



Sockets on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond Single Socket + Cover	White	12151/601



Sockets on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond Single Horizontal Socket + Cover	White	12161/601



Sockets on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond Double Socket + Cover	White	12155/601



DIAMOND RANGE
SOCKETS ON YOKE COMPLETE WITH COVERPLATE

DIAMOND RANGE

SOCKETS ON YOKE COMPLETE WITH COVERPLATE



Sockets on Yoke Complete 100 x 100mm		
Description	Colour	Part Number
Diamond Combo Socket + Cover	White	12167/601



Sockets on Yoke Complete 100 x 100mm - Polycarb		
Description	Colour	Part Number
Diamond USB Combo Socket + Cover Polycarb	White	12158/601



Sockets on Yoke Complete 100 x 100mm - Polycarb		
Description	Colour	Part Number
Diamond Combo Socket + Cover Polycarb	White	12157/601

DIAMOND RANGE

Crabtree

THAT WHICH IS BUILT SOUNDLY **ENDURES WELL**

CRABTREE
SOUTH AFRICA
PROVIDING YOU WITH
RELIABLE
SAFE
QUALITY
PRODUCTS



MADE IN SA. **SINCE 1947.**



For further information contact:
Sales: 0860 SOCKET (762 538) T 011 874 7600
WhatsApp 0615060326 I Instagram crabtreesouthafrica
info@crabtree.co.za I www.crabtree.co.za
Please review our terms and conditions of sale at www.crabtree.co.za

photo created by kues1



Switches on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever 1 Way Switch	White	10011/001
Diamond 1 Lever 1 Way Switch	Black	10011/008
Diamond 1 Lever 2 Way Switch	White	10012/001
Diamond 1 Lever 2 Way Switch	Black	10012/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever Coverplate	White	10001/601
Diamond 1 Lever Coverplate	Red	10001/603
Diamond 1 Lever Coverplate	Black	10001/608
Diamond 1 Lever Coverplate	Silver Grey	10001/612
Diamond 1 Lever Coverplate	Champagne	10001/651
Diamond 1 Lever Coverplate	Charcoal	10001/662
Diamond 1 Lever Coverplate Horizontal	White	10501/6



Switches on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever 1 Way Switch	White	10021/001
Diamond 2 Lever 1 Way Switch	Black	10021/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever Coverplate	White	10002/601
Diamond 2 Lever Coverplate	Black	10002/608
Diamond 2 Lever Coverplate	Silver Grey	10002/612
Diamond 2 Lever Coverplate	Champagne	10002/651
Diamond 2 Lever Coverplate	Charcoal	10002/662
Diamond 2 Lever Coverplate Horizontal	White	10502/6



Switches on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever 1 Way Switch	White	10031/001
Diamond 3 Lever 1 Way Switch	Black	10031/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever Coverplate	White	10003/601
Diamond 3 Lever Coverplate	Black	10003/608
Diamond 3 Lever Coverplate	Silver Grey	10003/612
Diamond 3 Lever Coverplate	Champagne	10003/651
Diamond 3 Lever Coverplate	Charcoal	10003/662
Diamond 3 Lever Coverplate Horizontal	White	10503/6



Switches on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever 1 Way Switch	White	10041/001
Diamond 4 Lever 1 Way Switch	Black	10041/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever Coverplate	White	10004/601
Diamond 4 Lever Coverplate	Black	10004/608
Diamond 4 Lever Coverplate	Silver Grey	10004/612
Diamond 4 Lever Coverplate	Champagne	10004/651
Diamond 4 Lever Coverplate	Charcoal	10004/662




DIAMOND RANGE

SWITCHES ON YOKES

DIAMOND RANGE

COVERPLATES

1 Lever Switch Module		Yoke (1 - 4 Lever) 100 x 100mm	
Description	Part Number		Part Number
Diamond 1 Lever 1 Way	10901/001		12740/000
Diamond 1 Lever 2 Way	10902/001		
			

2 Lever Switch Module		Yoke (1 - 4 Lever) 100 x 100mm	
Description	Part Number		Part Number
Diamond 2 Lever 1 Way	10901/001 (x 2)		12740/000
Diamond 2 Lever	10901/001 (x 1)		
Diamond 1 x 1 Way; Diamond 1 x 2 Way	10902/001 (x 1)		
			


3 Lever Switch Module		Yoke (1 - 4 Lever) 100 x 100mm	
Description	Part Number		Part Number
Diamond 3 Lever 1 Way	10901/001 (x 3)		12740/000
			

4 Lever Switch Module		Yoke (1 - 4 Lever) 100 x 100mm	
Description	Part Number		Part Number
Diamond 4 Lever 1 Way	10901/001 (x 4)		12740/000
			


Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond 1 Lever Coverplate	White	12001/601
Diamond 1 Lever Coverplate	Black	12001/608
Diamond 1 Lever Coverplate	Silver Grey	12001/612
Diamond 1 Lever Coverplate	Champagne	12001/651
Diamond 1 Lever Coverplate	Charcoal	12001/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever Coverplate	White	12002/601
Diamond 2 Lever Coverplate	Black	12002/608
Diamond 2 Lever Coverplate	Silver Grey	12002/612
Diamond 2 Lever Coverplate	Champagne	12002/651
Diamond 2 Lever Coverplate	Charcoal	12002/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever Coverplate	White	12003/601
Diamond 3 Lever Coverplate	Black	12003/608
Diamond 3 Lever Coverplate	Silver Grey	12003/612
Diamond 3 Lever Coverplate	Champagne	12003/651
Diamond 3 Lever Coverplate	Charcoal	12003/662




Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever Coverplate	White	12004/601
Diamond 4 Lever Coverplate	Black	12004/608
Diamond 4 Lever Coverplate	Silver Grey	12004/612
Diamond 4 Lever Coverplate	Champagne	12004/651
Diamond 4 Lever Coverplate	Charcoal	12004/662





Sockets on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 16A Single Vertical Socket	White	10050/001
Diamond 16A Single Vertical Socket	Black	10050/008



Sockets on Yoke 100 x 50mm		
Description	Colour	Part Number
Diamond Single Switch Socket Horizontal	White	10060/001
Diamond Single Switch Socket Horizontal	Black	10060/008



Double Pole Isolator 50 x 100mm		
Description	Colour	Part Number
Diamond 30A Double Pole	White	10230/001
Diamond 30A Double Pole	Black	10230/008
Diamond 60A Double Pole	White	10260/001
Diamond 60A Double Pole	Black	10260/008




Shaver Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Shaver Socket	White	10400/001
Diamond Shaver Socket	Black	10400/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	10007/601
Diamond Single Socket Coverplate	Red	10007/603
Diamond Single Socket Coverplate	Blue	10007/607
Diamond Single Socket Coverplate	Black	10007/608
Diamond Single Socket Coverplate	Silver Grey	10007/612
Diamond Single Socket Coverplate	Champagne	10007/651
Diamond Single Socket Coverplate	Charcoal	10007/662



Coverplate 100 x 50mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	10006/601
Diamond Single Socket Coverplate	Red	10006/603
Diamond Single Socket Coverplate	Blue	10006/607
Diamond Single Socket Coverplate	Black	10006/608
Diamond Single Socket Coverplate	Silver Grey	10006/612
Diamond Single Socket Coverplate	Champagne	10006/651
Diamond Single Socket Coverplate	Charcoal	10006/662



Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Coverplate	White	10003/601
Diamond Coverplate	Black	10003/608
Diamond Coverplate	Silver Grey	10003/612
Diamond Coverplate	Champagne	10003/651
Diamond Coverplate	Charcoal	10003/662




Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Shaver Coverplate	White	10090/601
Diamond Shaver Coverplate	Black	10090/608
Diamond Shaver Coverplate	Silver Grey	10090/612
Diamond Shaver Coverplate	Champagne	10090/651
Diamond Shaver Coverplate	Charcoal	10090/662





Sockets on Yoke 100 x 100mm		
Description	Colour	Part Number
Diamond Single Socket	White	12151/001
Diamond Single Socket	Black	12151/008



Sockets on Yoke 100 x 100mm		
Description	Colour	Part Number
Diamond Single Horizontal Socket	White	12161/001
Diamond Single Horizontal Socket	Black	12161/008



Sockets on Yoke 100 x 100mm - Polycarb		
Description	Colour	Part Number
Diamond Double Socket Polycarb	White	12155/001
Diamond Double Socket Polycarb	Red	12155/003
Diamond Double Socket Polycarb	Blue	12155/007
Diamond Double Socket Polycarb	Black	12155/008



Sockets on Yoke 100 x 100mm		
Description	Colour	Part Number
Diamond Combo Socket	White	12167/001
Diamond Combo Socket	Black	12167/008

Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	12007/601
Diamond Single Socket Coverplate	Red	12007/603
Diamond Single Socket Coverplate	Blue	12007/607
Diamond Single Socket Coverplate	Black	12007/608
Diamond Single Socket Coverplate	Silver Grey	12007/612
Diamond Single Socket Coverplate	Champagne	12007/651
Diamond Single Socket Coverplate	Charcoal	12007/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	12091/601
Diamond Single Socket Coverplate	Red	12091/603
Diamond Single Socket Coverplate	Blue	12091/607
Diamond Single Socket Coverplate	Black	12091/608
Diamond Single Socket Coverplate	Silver Grey	12091/612
Diamond Single Socket Coverplate	Champagne	12091/651
Diamond Single Socket Coverplate	Charcoal	12091/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Double Socket Coverplate	White	12008/601
Diamond Double Socket Coverplate	Red	12008/603
Diamond Double Socket Coverplate	Blue	12008/607
Diamond Double Socket Coverplate	Black	12008/608
Diamond Double Socket Coverplate	Silver Grey	12008/612
Diamond Double Socket Coverplate	Champagne	12008/651
Diamond Double Socket Coverplate	Charcoal	12008/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Combo Socket Coverplate	White	12087/601
Diamond Combo Socket Coverplate	Red	12087/603
Diamond Combo Socket Coverplate	Blue	12087/607
Diamond Combo Socket Coverplate	Black	12087/608
Diamond Combo Socket Coverplate	Silver Grey	12087/612
Diamond Combo Socket Coverplate	Champagne	12087/651
Diamond Combo Socket Coverplate	Charcoal	12087/662






Sockets on Yoke 100 x 100mm - Polycarb

Description	Colour	Part Number
Diamond Combo Socket Polycarb	White	12157/001
Diamond Combo Socket Polycarb	Red	12157/003
Diamond Combo Socket Polycarb	Blue	12157/007
Diamond Combo Socket Polycarb	Black	12157/008

Coverplate 100 x 100mm

Description	Colour	Part Number
Diamond Combo Socket Coverplate	White	12088/601
Diamond Combo Socket Coverplate	Black	12088/608
Diamond Combo Socket Coverplate	Silver Grey	12088/612
Diamond Combo Socket Coverplate	Champagne	12088/651
Diamond Combo Socket Coverplate	Charcoal	12088/662



COMING SOON



Sockets on Yoke 100 x 100mm - Polycarb

Description	Colour	Part Number
Diamond USB Combo Socket Polycarb	White	12158/001
Diamond USB Combo Socket Polycarb	Black	12158/008

Coverplate 100 x 100mm

Description	Colour	Part Number
Diamond Combo Socket Coverplate	White	12089/601
Diamond Combo Socket Coverplate	Black	12089/608
Diamond Combo Socket Coverplate	Silver Grey	12089/612
Diamond Combo Socket Coverplate	Champagne	12089/651
Diamond Combo Socket Coverplate	Charcoal	12089/662



COMING SOON



Isolators 100 x 100mm

Description	Colour	Part Number
Diamond 30A Double Pole Isolator	White	12230/001
Diamond 30A Double Pole Isolator	Black	12230/008
Diamond 60A Double Pole Isolator	White	12260/001
Diamond 60A Double Pole Isolator	Black	12260/008
Diamond 60A Triple Pole Isolator	White	12360/001
Diamond 60A Triple Pole Isolator	Black	12360/008

Coverplate 100 x 100mm

Description	Colour	Part Number
Diamond 3 Lever Coverplate	White	12003/601
Diamond 3 Lever Coverplate	Black	12003/608
Diamond 3 Lever Coverplate	Silver Grey	12003/612
Diamond 3 Lever Coverplate	Champagne	12003/651
Diamond 3 Lever Coverplate	Charcoal	12003/662



Pop-up Socket for Diamond Ducting 3 x 25mm

Description	Colour	Part Number
Diamond Pop-Up Socket Housing Aluminium Only		11901/Z



Single Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Single Slimline 16A Socket	White	10051/001
Diamond Single Slimline 16A Socket	Black	10051/008



Double Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Double Slimline 16A Socket	White	10052/001
Diamond Double Slimline 16A Socket	Black	10052/008



Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Single Slimline 16A Switch Socket	White	10053/001
Diamond Single Slimline 16A Switch Socket	Black	10053/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	10051/601
Diamond Single Socket Coverplate	Black	10051/608
Diamond Single Socket Coverplate	Silver Grey	10051/612
Diamond Single Socket Coverplate	Champagne	10051/651
Diamond Single Socket Coverplate	Charcoal	10051/662



Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Double Socket Coverplate	White	10052/601
Diamond Double Socket Coverplate	Black	10052/608
Diamond Double Socket Coverplate	Silver Grey	10052/612
Diamond Double Socket Coverplate	Champagne	10052/651
Diamond Double Socket Coverplate	Charcoal	10052/662



Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Single Switch Socket Coverplate	White	10053/601
Diamond Single Switch Socket Coverplate	Black	10053/608
Diamond Single Switch Socket Coverplate	Silver Grey	10053/612
Diamond Single Switch Socket Coverplate	Champagne	10053/651
Diamond Single Switch Socket Coverplate	Charcoal	10053/662





Rotary Dimmers Complete with Coverplates 50 x 100mm		
Description Switched Knob	Colour	Part Number
Diamond 1 Lever Dimmer Switch 600W + Cover	White	10601/601
Diamond 1 Lever Dimmer Switch 800W + Cover	White	10801/601
Diamond 1 Lever Dimmer Switch 500W + Cover LED	White	10501/601

Rotary Dimmer Module with Switched Pot		
Description	Colour	Part Number
Diamond 600W Dimmer Module	White	10908/001
Diamond 600W Dimmer Module	Black	10908/008
Diamond 800W Dimmer Module	White	10909/001
Diamond 800W Dimmer Module	Black	10909/008
Diamond 500W Dimmer Module LED	White	10910/001
Diamond 500W Dimmer Module LED	Black	10910/008
Diamond 500W Dimmer Module LED	Red	10910/003



Rotary Dimmers Complete with Coverplates 50 x 100mm		
Description Switched Knob	Colour	Part Number
Diamond 2 Lever Dimmer + Rotary 600W + Cover	White	10602/601
Diamond 2 Lever Dimmer + Rotary 500W + Cover LED	White	10502/601

Rotary Dimmers Complete with Coverplates 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever Dimmer + Rotary 600W + Cover	White	10603/601
Diamond 3 Lever Dimmer + Rotary 500W + Cover LED	White	10503/601

LED Dimmer Modules	
Description	Part Number
LED Dimmers	BP125LED
LED Dimmers	BP500LED



Rotary Dimmers on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 2 Lever Dimmer + Rotary 600W	White	10602/001
Diamond 2 Lever Dimmer + Rotary 600W	Black	10602/008
Diamond 2 Lever Dimmer + Rotary 500W LED	Black	10502/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever Coverplate	White	10003/601
Diamond 3 Lever Coverplate	Black	10003/608
Diamond 3 Lever Coverplate	Silver Grey	10003/612
Diamond 3 Lever Coverplate	Champagne	10003/651
Diamond 3 Lever Coverplate	Charcoal	10003/662



Switches on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond 3 Lever Dimmer + Rotary 600W	White	10603/001
Diamond 3 Lever Dimmer + Rotary 600W	Black	10603/008
Diamond 3 Lever Dimmer + Rotary 500W LED	Black	10503/008

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond 4 Lever Coverplate	White	10004/601
Diamond 4 Lever Coverplate	Black	10004/608
Diamond 4 Lever Coverplate	Silver Grey	10004/612
Diamond 4 Lever Coverplate	Champagne	10004/651
Diamond 4 Lever Coverplate	Charcoal	10004/662





Dedicated Sockets 100 x 50mm with Coverplate		
Description	Colour	Part Number
Diamond Dedicated Single Socket + Cover	Red	10461/601
Diamond Dedicated Single Socket + Cover	Black	10466/601
Diamond Dedicated Single Socket + Cover	Blue	10467/601



Dedicated Sockets 100 x 100mm White Coverplate		
Description	Colour	Part Number
Diamond Red Dedicated Single Socket + Cover	White	12462/601
Diamond Blue Dedicated Single Socket + Cover	White	12467/601
Diamond Black Dedicated Single Socket + Cover	White	12465/601



Dedicated Socket 100 x 100mm - Polycarb		
Description	Colour	Part Number
Diamond Dedicated Double Socket Polycarb	Red	12155D/003
Diamond Dedicated Double Socket Polycarb	Blue	12155D/007
Diamond Dedicated Double Socket Polycarb	Black	12155D/008



Dedicated Sockets 100 x 50mm with Coverplate		
Description	Colour	Part Number
Diamond Dedicated Single Socket + Cover	Red	10461/603



Dedicated Socket 100 x 100mm		
Description	Colour	Part Number
Diamond Dedicated Single Socket + Cover	Red	12452/603
Diamond Dedicated Single Socket + Cover	Blue	12457/607
Diamond Dedicated Single Socket + Cover	Black	12455/608



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Double Socket Coverplate	White	12008/601
Diamond Double Socket Coverplate	Red	12008/603
Diamond Double Socket Coverplate	Blue	12008/607
Diamond Double Socket Coverplate	Black	12008/608
Diamond Double Socket Coverplate	Silver Grey	12008/612
Diamond Double Socket Coverplate	Champagne	12008/651
Diamond Double Socket Coverplate	Charcoal	12008/662



Single Dedicated Slimline Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Single Dedicated Slimline 16A Socket	Red	10051D/003
Diamond Single Dedicated Slimline 16A Socket	Black	10051D/008
Diamond Single Dedicated Slimline 16A Socket	Blue	10051D/007



Double Dedicated Slimline Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Double Dedicated Slimline 16A Socket	Red	10052D/003
Diamond Double Dedicated Slimline 16A Socket	Black	10052D/008
Diamond Double Dedicated Slimline 16A Socket	Blue	10052D/007



Single Dedicated Slimline Socket on Yoke 50 x 100mm		
Description	Colour	Part Number
Diamond Single Dedicated 16A Switch Socket	Red	10053D/003
Diamond Single Dedicated 16A Switch Socket	Black	10053D/008
Diamond Single Dedicated 16A Switch Socket	Blue	10053D/007



Single Dedicated Combo Socket on Yoke 100 x 100mm		
Description	Colour	Part Number
Diamond Combo Dedicated 16A Socket	Red	12167D/003
Diamond Combo Dedicated 16A Socket	Black	12167D/008
Diamond Combo Dedicated 16A Socket	Blue	12167D/007

Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Single Socket Coverplate	White	10051/601
Diamond Single Socket Coverplate	Black	10051/608
Diamond Single Socket Coverplate	Silver Grey	10051/612
Diamond Single Socket Coverplate	Champagne	10051/651
Diamond Single Socket Coverplate	Charcoal	10051/662



Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Double Socket Coverplate	White	10052/601
Diamond Double Socket Coverplate	Black	10052/608
Diamond Double Socket Coverplate	Silver Grey	10052/612
Diamond Double Socket Coverplate	Champagne	10052/651
Diamond Double Socket Coverplate	Charcoal	10052/662



Coverplate 50 x 100mm		
Description	Colour	Part Number
Diamond Single Switch Socket Coverplate	White	10053/601
Diamond Single Switch Socket Coverplate	Black	10053/608
Diamond Single Switch Socket Coverplate	Silver Grey	10053/612
Diamond Single Switch Socket Coverplate	Champagne	10053/651
Diamond Single Switch Socket Coverplate	Charcoal	10053/662



Coverplate 100 x 100mm		
Description	Colour	Part Number
Diamond Combo Socket Coverplate	White	12087/601
Diamond Combo Socket Coverplate	Red	12087/603
Diamond Combo Socket Coverplate	Black	12087/608
Diamond Combo Socket Coverplate	Silver Grey	12087/612
Diamond Combo Socket Coverplate	Champagne	12087/651
Diamond Combo Socket Coverplate	Charcoal	12087/662



DIAMOND RANGE

COMMUNICATION MODULES

DIAMOND RANGE

DUCTING

Ducting Yoke 50 x 100mm

Description	Part Number
To fit Ducting Modules 3x25mm	10750/000



3 Module Coverplates 50 x 100mm

Description	Part Number
White	10916/601
Red	10916/603
Black	10916/608
Silver Grey	10916/612
Champagne	10916/651
Charcoal	10916/662



Ducting Yoke 100 x 100mm

Description	Part Number
To fit Ducting Modules 6x25mm	12720/000



6 Module Coverplates 100 x 100mm

Description	Part Number
White	12017/601
Red	12017/603
Black	12017/608
Silver Grey	12017/612
Champagne	12017/651
Charcoal	12017/662



Ducting Yoke 100 x 100mm

Description	Part Number
To fit Ducting Modules 3x25mm	12710/000



3 Module Coverplates 100 x 100mm

Description	Part Number
White	12018/601
Red	12018/603
Black	12018/608
Silver Grey	12018/612
Champagne	12018/651
Charcoal	12018/662





Ducting Range Yokes 100 x 50mm

Description	Part Number
Diamond Ducting Yoke (3x25mm)	11000/100
Diamond Ducting Yoke (2x25mm)	11001/100

6 or 9 Way Wallbox 262 x 60 x 50mm

Description	Colour	Part Number
Diamond 9 Way Flush Wallbox	White	11801/6
Diamond 9 Way Surface Box	White	11802/6



18 Way Flush Mount 292 x 180mm

Description	Colour	Part Number
Diamond 18 Way Box + Cover + Yoke	White	11818/601
Diamond 18 Way Cover + Yoke Only	White	11818/601CY



6 Way Coverplate 292 x 90mm + Yoke

Description	Colour	Part Number
Diamond 6 Way Coverplate	White	11806/601
Diamond 6 Way Coverplate	Black	11806/608
Diamond 6 Way Coverplate	Silver Grey	11806/612
Diamond 6 Way Coverplate	Champagne	11806/651
Diamond 6 Way Coverplate	Charcoal	11806/662



9 Way Coverplate 292 x 90mm + Yoke

Description	Colour	Part Number
Diamond 9 Way Coverplate	White	11809/601
Diamond 9 Way Coverplate	Black	11809/608
Diamond 9 Way Coverplate	Silver Grey	11809/612
Diamond 9 Way Coverplate	Champagne	11809/651
Diamond 9 Way Coverplate	Charcoal	11809/662





Krone Unshuttered Data Modules 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Data RJ45 Cat 6	White	11896/001
Diamond Ducting Data RJ45 Cat 6	Black	11896/008

Ducting Satellite Modules 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Satellite Module	White	11996/001
Diamond Ducting Satellite Module	Black	11996/008



Econo Range Multifunction Data / Tel Modules 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Data RJ45 Cat 6	White	11894/001
Diamond Ducting Data RJ45 Cat 6	Black	11894/008

Ducting Satellite Modules 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Double Satellite Module	White	11998/001
Diamond Ducting Double Satellite Module	Black	11998/008



Tel / Data Modules 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Tel/Data RJ45 Cat 6	White	11815/001
Diamond Ducting Tel/Data RJ45 Cat 6	Black	11815/008

Ducting Blank Module 25 x 50mm		
Description	Colour	Part Number
Diamond Ducting Blank Module	White	11900/001
Diamond Ducting Blank Module	Red	11900/003
Diamond Ducting Blank Module	Blue	11900/007
Diamond Ducting Blank Module	Black	11900/008



Ducting Half Blank Module 12.5 x 50mm		
Description	Colour	Part Number
Diamond Ducting Half Blank Module	White	11910/001
Diamond Ducting Half Blank Module	Red	11910/003
Diamond Ducting Half Blank Module	Blue	11910/007
Diamond Ducting Half Blank Module	Black	11910/008





Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting 1 Way Switch	White	11901/001
Diamond Ducting 1 Way Switch	Red	11901/003
Diamond Ducting 1 Way Switch	Blue	11901/007
Diamond Ducting 1 Way Switch	Black	11901/008



Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting 2 Way Switch	White	11902/001
Diamond Ducting 2 Way Switch	Red	11902/003
Diamond Ducting 2 Way Switch	Blue	11902/007
Diamond Ducting 2 Way Switch	Black	11902/008



Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting 1 Way Switch + LED	White	11981/001
Diamond Ducting 1 Way Switch + LED	Red	11981/003
Diamond Ducting 1 Way Switch + LED	Blue	11981/007
Diamond Ducting 1 Way Switch + LED	Black	11981/008



Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting Double Pole Switch	White	11904/001
Diamond Ducting Double Pole Switch	Red	11904/003
Diamond Ducting Double Pole Switch	Blue	11904/007
Diamond Ducting Double Pole Switch	Black	11904/008

Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting Twin Switch	White	11944/001
Diamond Ducting Twin Switch	Black	11944/008



Ducting Switch Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting Bell Press Dimmer-On-Off Switch	White	11930/001
Diamond Ducting Bell Press Dimmer-On-Off Switch	Black	11930/008



Ducting Switch Modules 25 x 50mm


Description	Colour	Part Number
Diamond Ducting Cord Grip	White	11906/001
Diamond Ducting Cord Grip	Red	11906/003
Diamond Ducting Cord Grip	Blue	11906/007
Diamond Ducting Cord Grip	Black	11906/008



Ducting 164-2 Socket Modules 25 x 50mm

Description	Colour	Part Number
Diamond Ducting Slimline Socket	White	11850/001
Diamond Ducting Slimline Socket	Red	11850/003
Diamond Ducting Slimline Socket	Black	11850/008
Diamond Ducting Slimline ISO/Earth Socket	White	11850/001IE
Diamond Ducting Slimline ISO/Earth Socket	Red	11850/003IE






Dedicated 164-2-1 Socket Module 25 x 50mm

Description	Colour	Part Number
Diamond 16A Dedicated Slimline Socket	Red	11850D/003
Diamond 16A Dedicated Slimline Socket	Blue	11850D/007
Diamond 16A Dedicated Slimline Socket	Black	11850D/008



Dedicated 164-4 Ducting Socket Modules 50 x 50mm

Description	Colour	Part Number
Diamond Ducting Dedicated Socket Module	Red	11451/003
Diamond Ducting Dedicated Socket Module	Blue	11457/007
Diamond Ducting Dedicated Socket Module	Black	11454/008



164-1 Ducting Socket Modules 50 x 50mm

Description	Colour	Part Number
Diamond Ducting Socket	White	11915/001
Diamond Ducting Socket	Red	11915/003
Diamond Ducting Socket	Blue	11915/007
Diamond Ducting Socket	Black	11915/008
Diamond Ducting Socket ISO/Earth	White	11915/001IE
Diamond Ducting Socket ISO/Earth	Red	11915/003IE
Diamond Ducting Socket ISO/Earth	Blue	11915/007IE
Diamond Ducting Socket ISO/Earth	Black	11915/008IE

Schuko 164-6 Socket No Earth 50 x 50mm

Description	Colour	Part Number
Diamond Schuko Socket	White	11460/001
Diamond Schuko Socket	Red	11460/003
Diamond Schuko Socket	Black	11460/008



Schuko Socket with earth (EXPORT MARKET) 50 x 50mm

Description	Colour	Part Number
Schuko	White	11459/001
Schuko	Red	11459/003
Schuko	Black	11459/008




13A British Socket Module (EXPORT MARKET) 50 x 50mm

Description	Colour	Part Number
Diamond 13A Socket	White	11941/001
Diamond 13A Socket	Red	11941/003
Diamond 13A Socket	Blue	11941/007
Diamond 13A Socket	Black	11941/008



10A British Socket Module (EXPORT MARKET) 50 x 50mm

Description	Colour	Part Number
Diamond 10A Socket	White	11916/001
Diamond 10A Socket	Black	11916/008





USB Socket Module 25 x 50mm		
Description	Colour	Part Number
USB Module	White	11971/001
USB Module	Black	11971/008
Specifications		Standards
Output: 5V / 2,1 Amp		IEC 60950-1
Output Range: 4,75 Vdc - 5,25 Vdc		IEC 61000-3-2
Operating Temperature: 5 - 50 °C		IEC 61000-3-3
Idle Current: 0mA (When shutter closed)		CISPR22 / CISPR24




HDMI Socket Module 25 x 50mm		
Description	Colour	Part Number
HDMI Module Single	White	11907/001
HDMI Module Single	Black	11907/008
HDMI Module Double	White	11908/001
HDMI Module Double	Black	11908/008

THAT WHICH IS BUILT SOUNDLY **ENDURES WELL**



Design your **OWN** combination using our innovative Cluster Range.

Available in 6, 9 and 18 Way with a wide range of ducting options and colours

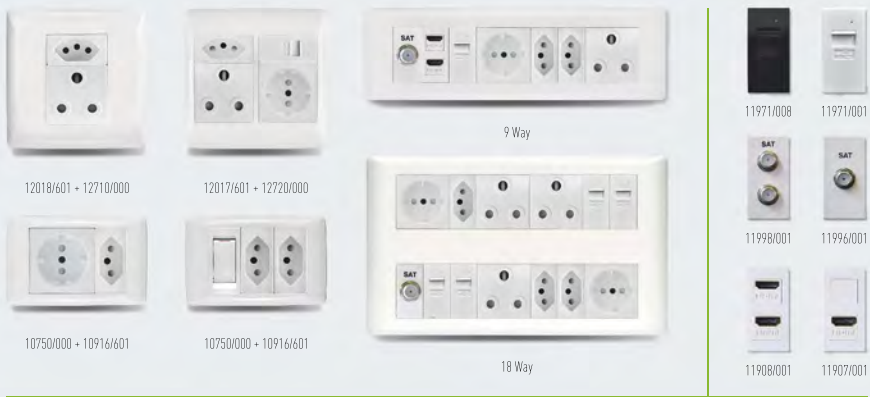

Note: Colour swatches are only an indication of the colour - do not use for colour matching purposes.



For further information contact:
Sales: 0860 SCKET 1762 5381 / 011 874 7600
Whatsapp: 061 904 0024 / Instagram: crabtreeafrica
info@crabtree.co.za / www.crabtree.co.za
Please review our terms and conditions of sale at www.crabtree.co.za



Diamond Rail		
Description	Length	Part Number
6 Way x 164-1 (Sockets)	475mm	11701/008



Diamond Rail		
Description	Length	Part Number
10 Way 5 x 164-1 (Sockets) + 5 x 164-2 (Slimline)	650mm	11705/008



Diamond Rail		
Description	Length	Part Number
7 Way 4 x 164-1 (Sockets) + 3 x 164-2 (Slimline)	475mm	11702/008



Diamond Rail		
Description	Length	Part Number
12 Way x 164-2 (Slimline)	650mm	11706/008



Diamond Rail		
Description	Length	Part Number
9 Way x 164-2 (Sockets)	475mm	11703/008



Diamond Rail		
Description	Length	PartNumber
4 Way IEC Hub	110mm	11707/008



Diamond Rail		
Description	Length	Part Number
8 Way x 164-1 (Sockets)	650mm	11704/008



IEC Cord					
Description		Part Number	Description		Part Number
Male to Female 1m		4205	IEC Male to IEC Female 1m		4207
Male to Female 2m		4206			



Single-Phase circuits supplying Socket outlets rated at NOT more than 16Ampere

Single-Phase Circuits that only supply socket-outlets rated at not more than 16A shall, if the circuit protection is rated at more than 20A, use only protected socket-outlets, with, as far as is practicable, discrimination between the protective devices for the circuit and the protective devices associated with the socket-outlets. The protective device of a protected socket-outlet shall...

1. have a fixed rated current that does not exceed the rating of the socket-outlet,
2. be mounted next to the socket-outlet that protects it
3. provide protection against overload currents,
4. unless short-circuit protection is provided by a separate device, for example on the distribution board, provide protection against short-circuit currents,
5. if it needs the protection of a back-up short-circuit device, be marked with the required or maximum rating of the back-up device,
6. if it protects more than one socket-outlet, be so installed that all the socket-outlets are connected in parallel, have the same rated current and are mounted next to the device, and may, if a ring circuit is used instead of a radial circuit, use conductors least 16A.

Installing Switches and Sockets

- Isolate mains before starting work.
- For flush mounting use a 50mm deep steel box as per SABS-1085.
- Recommended stripping length for cable installation is 8mm.


Cables should be connected as follows:

- Terminal L—Live (Red)
- Terminal N—Neutral (Black)
- Terminal E—Earth (Green/Yellow)

Conditions of Use


The products referred to in this instruction leaflet should be installed by suitable qualified personnel in accordance with the requirements of all relevant legislation, regulations and the accepted practice in the industry. Any further information which may be required about the use for which any specific product has been designed and tested, or about the conditions of use, is available on request.

Cover Plate Dimensions

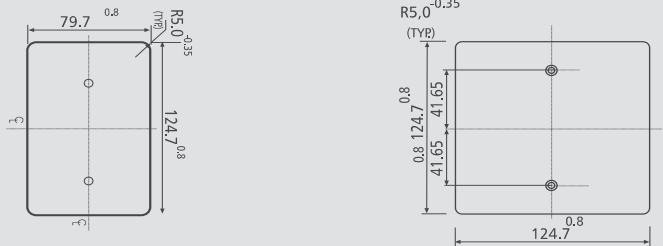


Standard Wiring Diagrams

One Way Switching Two Way Switching

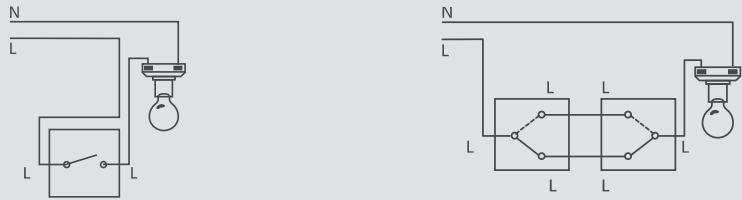

Intermediate Switching One Way Double Pole Switching

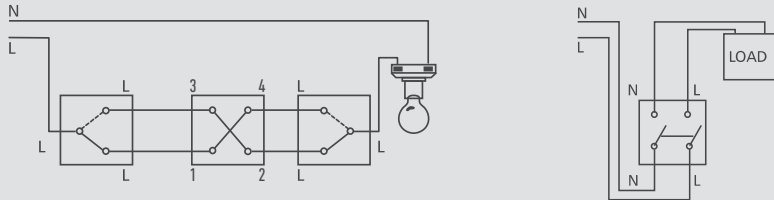

Diamond Rotary Dimmer Wiring Diagrams

1 Lever Dimmer	2 Lever Dimmer	3 Lever Dimmer
----------------	----------------	----------------

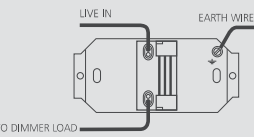


FIGURE 1

- Turn the mains off at the distribution board
- Remove the existing switch from the wall box
- Study the wiring diagram
- Proceed to connect the dimmer as shown in figure 1
- The rotary dimmer has no internal switch
- Check that all wiring connections are tight and that no un-insulated wires are showing
- Re-assemble the dimmer into the wall box and re-place the cover plate

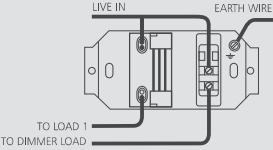


FIGURE 2

- Turn the mains off at the distribution board
- Remove the existing switch from the wall box
- Study the wiring diagram
- Proceed to connect the dimmer as shown in figure 2
- A single dimmer circuit together with 1 alternative circuit can be connected
- The rotary dimmer has no internal switch
- Check that all wiring connections are tight and that no un-insulated wires are showing


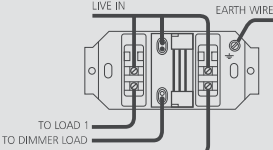


FIGURE 3

- Turn the mains off at the distribution board
- Remove the existing switch from the wall box
- Study the wiring diagram
- Proceed to connect the dimmer as shown in figure 3
- A single dimmer circuit together with 2 alternative circuits can be connected
- The rotary dimmer has an internal switch
- Check that all wiring connections are tight and that no un-insulated wires are showing
- Re-assemble the dimmer into the wall box and re-place the cover plate


Multiple Dimming with Standard 4 Wire Dimmer

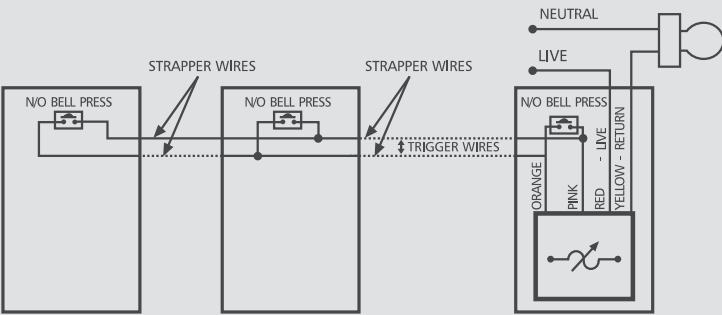


1. FOR ONE WAY DIMMING
 - Connect the orange and pink wires to the respective terminals of the bell press module
 - Connect the red dimmer wire to the Live incoming wire
 - Connect the yellow dimmer wire to the load/return wire going to the lights.
2. FOR 2 WAY DIMMING
 - Draw 2 strapper wires from the wall box containing the dimmer to the next wall box where you need to dim the same set of lights
 - Connect the strapper wires to the respective orange and pink wires of the dimmer
 - In the next wall box connect the strappers to the respective terminals of the bell press modules

Bell Press Wiring Diagrams

One Way Dimming with Standard 4 Wire Dimmer

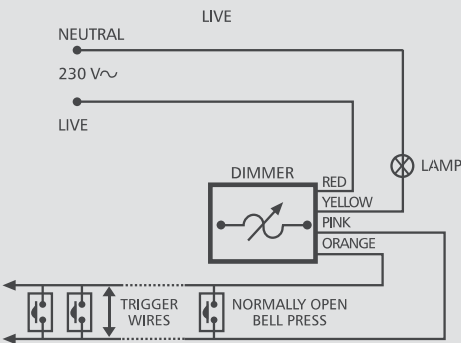

Converting 2 Way Switching Into 2 Way Dimming

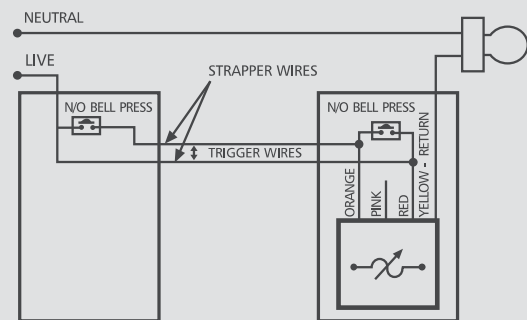

- Place the dimmer module in wall box 1 where the load/return wires to the lights are.
- Connect the yellow dimmer wire of the dimmer to the load/return wire you need to dim.
- Connect the red and orange dimmer wires to the respective terminals of the bell press module
- Connect the existing strapper wires coming from wall box 2 and also connect them to the respective terminals of the bell press module
- Cut or insulate the pink wire of the dimmer module
- The strapper connected to the red dimmer wire in wall box 1 is connected to the incoming Live wire in wall box 2
- One side of the bell press module is also connected to the incoming Live wire
- The other side of the bell press module is connected to the remaining strapper

Rotary Dimmer Load Chart

240 V INCANDESCENT						240 V INCANDESCENT					
MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:		
40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W
3	2	1	13	9	6	3	2	2	18	12	7

12 V LOW-VOLTAGE						12 V LOW-VOLTAGE					
MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:		
20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W
4	2	2	23	13	9	5	3	2	32	18	13

Bell Press Dimmer Load Chart

240 V INCANDESCENT						240 V INCANDESCENT						240 V INCANDESCENT						240 V INCANDESCENT					
MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:		
40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W	40 W	60 W	100 W
3	2	1	9	6	3	3	2	1	12	8	5	4	3	2	20	13	8	4	3	2	25	16	10

12 V LOW-VOLTAGE						12 V LOW-VOLTAGE						12 V LOW-VOLTAGE						12 V LOW-VOLTAGE					
MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:			MINIMUM NO. OF LAMPS:			MAXIMUM NO. OF LAMPS:		
20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W	20 W	35 W	50 W
3	2	1	12	7	5	4	3	2	20	11	8	5	3	3	35	20	14	7	4	3	45	25	18