

SHEET 1 OF 2

11459 (All Variants) 11460 (All Variants) Schuko Socket Module



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data

CONSTRUCTION

Product Category	Wiring Accessory
Product Range	Diamond Ducting
Product Type	Socket Outlet 16 Amps
Shape	Module
Material	Polycarbonate (Cover)
Finish	Moulded
Mounting Type	Flush/Surface

POWER

Current	16 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Rocker Switches	Un-switched
Non Dedicated	SANS 164-6
Dedicated	N/A

AESTHETICS

Plate Colour	White, Black & Red
Key Features	16A Socket module

TERMINAL

L & N Terminal	4mm x 5mm
Earth Terminal	4mm x 5mm
Cable Strip Length	10mm
Screwdriver Type	Slotted Type
Torque requirement	0.8Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C

DIMENSIONAL / FIXING





Height	50mm
Width	50mm
Depth Overall	40.5mm
Depth Interior only	36.9mm
Gross Weight	N/A

STANDARDS

Standards	SABS
Other Markings	S19

PACKAGING

Inner Carton Qty	10
Master Carton Qty	100

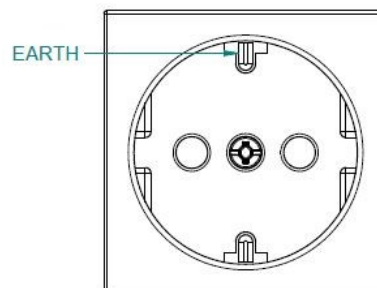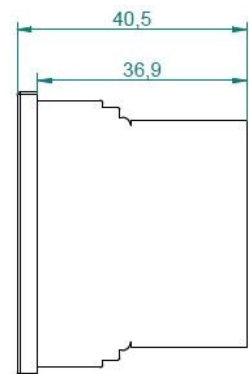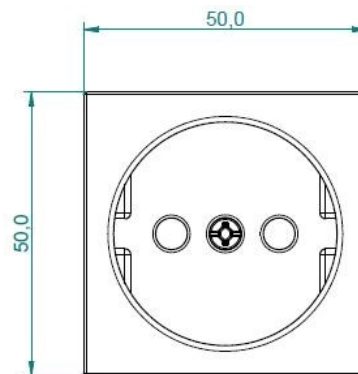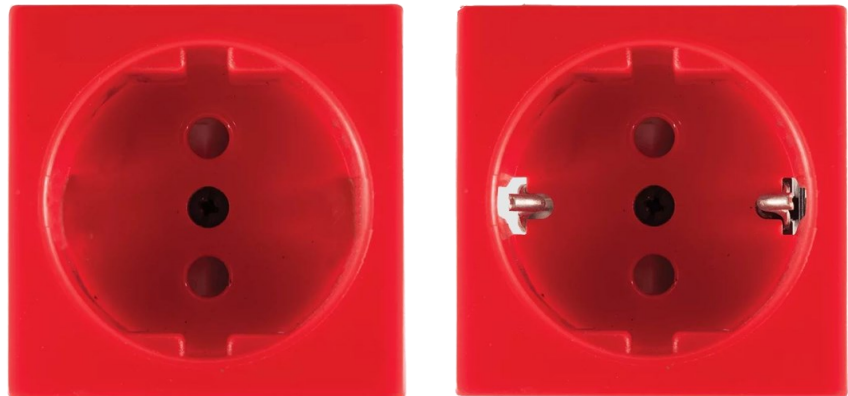

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za

SHEET 2 OF 2

11459 (All Variants)
11460 (All Variants)
Schuko Socket Module



THAT WHICH IS BUILT SOUNDLY **ENDURES WELL**

Schuko Socket with earth (EXPORT MARKET) 50 x 50mm		
Description	Colour	Part Number
Schuko	White	11459/001
Schuko	Red	11459/003
Schuko	Black	11459/008

Schuko 16A-6 Socket No Earth 50 x 50mm		
Description	Colour	Part Number
Diamond Schuko Socket	White	11460/001
Diamond Schuko Socket	Red	11460/003
Diamond Schuko Socket	Black	11460/008

Note:

Dedicated socket outlets are provided for supplies which are intended for "Clean" power, UPS and Non RCD protected outlets. The Earth connections A and B are therefore separated and not internally connected in the socket module. Where separation is NOT required, the installer needs to provide a link between A and B.

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za