

SHEET 1 OF 2

6881/ 001 & /008

6882/003

6884/007

6883/008

Classic Double Socket



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data

CONSTRUCTION

Product Category	Wiring Accessory
Product Range	Classic
Product Type	Socket Outlet 16 Amps
Shape	4x4
Material	ABS (Cover)
Finish	Moulded
Mounting Type	Flush/Surface

POWER

Current	20 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Rocker Switches	Switched
Non Dedicated	SANS 164-1
Dedicated	SANS 164-4

AESTHETICS

Plate Colour	White, Black, Blue & Red
Key Features	Double Socket / Dedicated

TERMINAL

L & N Terminal	7mm x 8mm
Earth Terminal	7mm x 8mm
Cable Strip Length	10mm
Screwdriver Type	Slotted Type
Torque requirement	1.2Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C

DIMENSIONAL / FIXING




Height	114mm
Width	112mm
Depth Overall	36mm
Depth Interior only	26mm
Gross Weight	0,178 kg

STANDARDS

Standards	SABS
Other Markings	S21, If Dedicated Use S21D

PACKAGING

Inner Carton Qty	5
Master Carton Qty	N/A

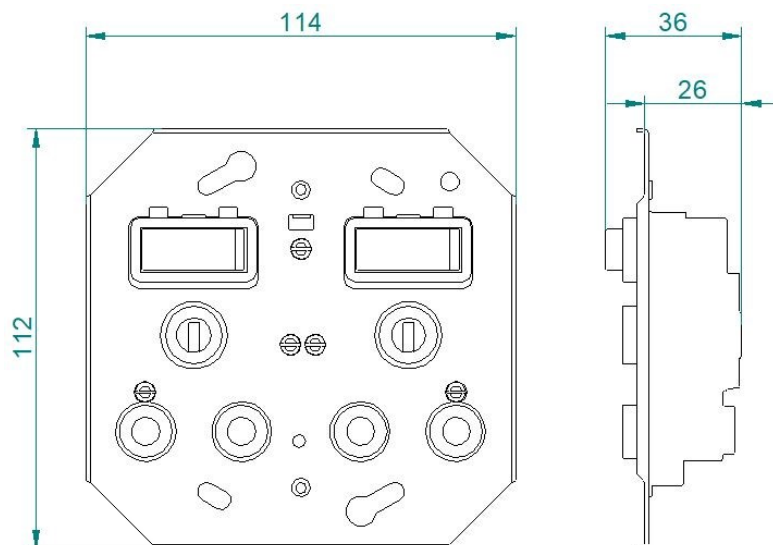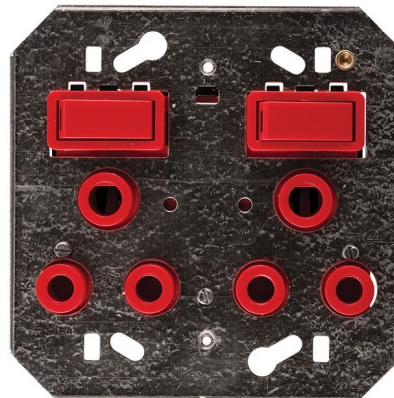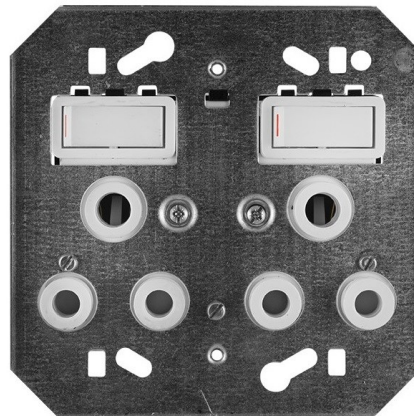

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za

SHEET 2 OF 2

6881/ 001 & /008
6882/003
6884/007
6883/008

Classic Double Socket



THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Monoblock Sockets on Yoke 100 x 100mm

Description	Colour	Part Number
Classic Double 16A Switched Socket	White	6881/001P
Classic Double 16A Switched Socket	Black	6881/008P

Dedicated Monoblock Socket with Isolated Earth 100 x 100mm

Description	Colour	Part Number
Classic Double 16A Switch Socket Dedicated	Red	6882/003P
Classic Double 16A Switch Socket Dedicated	Blue	6884/007
Classic Double 16A Switch Socket Dedicated	Black	6883/008

1	2	3
Earth Pin	Angle of earth pin flattened surface	Plug Colour
	+ 53°	National Flag blue
	0°	Signal red
	- 53°	Black

Note:

Dedicated socket outlets are provided for supplies which are intended for "Clean" power, UPS and Non RCD protected outlets. The Earth connections A and B are therefore separated and not internally connected in the socket module. Where separation is NOT required, the installer needs to provide a link between A and B.

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za