

7390

Industrial Duo Socket

CONSTRUCTION

Product Category	Wiring Accessory
Product Range	Industrial
Product Type	Socket Outlet 16 Amps
Material	Steel & Polycarbonate (Cover & Socket)
Finish	Pressed & Moulded
Mounting Type	Surface

POWER

Current	16 Amps
Current Type	AC
Frequency	50Hz
Input Voltage	250V
Rocker Switches	Switched
Number of Ways	N/A
Non Dedicated	SANS 164-1
Dedicated	N/A

AESTHETICS

Plate Colour	White, Orange
Rocker Colour	White
Switched Outlet	2
Key Features	Single Socket

TERMINAL

L & N Terminal	7mm x 7mm
Earth Terminal	7mm x 7mm
Cable Strip Length	10—12mm
Screwdriver Type	Slotted Type
Torque requirement	1.2Nm

LOCATION

Max Ambient Operating Temp	+40°C
Min Ambient Operating Temp	-5°C

DIMENSIONAL / FIXING

Height	86.2mm
Width	121.8mm
Depth Overall	59.6mm
Depth Interior only	47.5mm
Gross Weight	0,327 kg

STANDARDS

Standards	SABS
Other Markings	N/A

PACKAGING

Inner Carton Qty	1
Master Carton Qty	60




THAT WHICH IS BUILT SOUNDLY ENDURES WELL

Technical Data



7390p

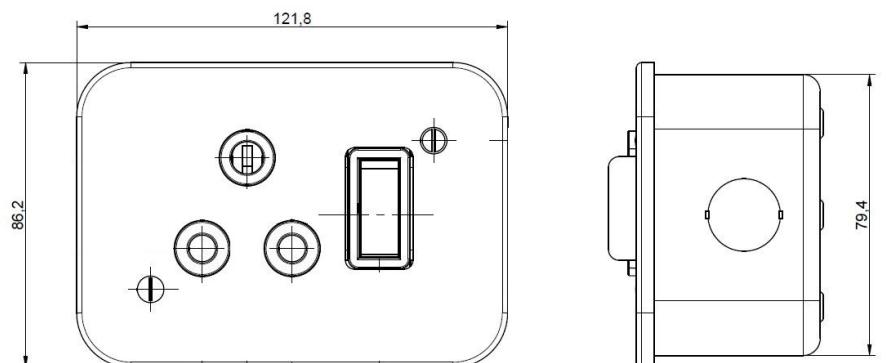

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Latest details can be obtained from Crabtree. Contact details below.



0860 SOCKET (762538)



Whatsapp: 061 906 0326



www.crabtree.co.za



Davidson Rd & Wadeville Rd, Wadeville, Germiston, 1422



info@crabtree.co.za